

ВЫВОДНОЙ СВЕТОДИОД КРУГЛЫЙ

ARL-3014WW-B

FEATURES

- Electricity control IC embedded.
- Fancy, fun, hottest in the market.
- Lens size with 5/8/10 mm options.
- Viewing angle: 40°.
- Operating voltage range: DC 3–5 V.
- Blinking frequency: 1.8 Hz.
- Frequency tolerance: $\pm 20\%$.
- RoHS compliant.

DESCRIPTIONS

- New trend creations.
- Low energy consumptions.
- Low maintenance costs.
- High application design flexibility.
- High reliability.

APPLICATIONS

- Toys / sports utilities.
- Miniature key chains.
- Effect lights.
- Display / decoration lights.
- Electronic displays and signals.
- Interior decoration lights.
- Indicator lights.
- Solar energy lights / garden lights.

DEVICE SELECTION GUIDE

LED Part No.	CHIP		Lens Color
	Material	Emitted Color	
ARL-3014WW-B	InGaN	White	White Diffused



3 mm



DIFFUSED



WHITE



USAGE NOTES:


Surge will damage the LED.

When using LED, it must use a protective resistor in series with DC current about 20 mA.



ATTENTION!
ELECTROSTATIC SENSITIVE DEVICES.
OBSERVE PRECAUTIONS FOR HANDLING.

PACKAGE DIMENSIONS

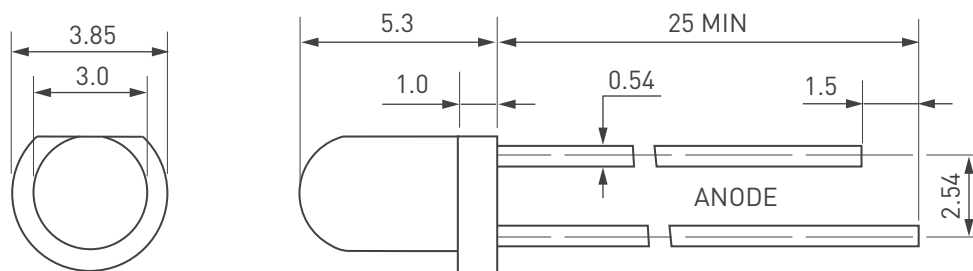

Unit: mm.

ABSOLUTE MAXIMUM RATING ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Unit
Peak Forward Current	I_{FPM}	100	mA
Forward Current	I_{FM}	30	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	100	mW
Operating Temperature	T_{opr}	$-40 \dots +80$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40 \dots +100$	$^\circ\text{C}$
Soldering Heat (5s)	T_{sol}	260	$^\circ\text{C}$

ELECTRO-OPTICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	1500	1800	2200	mcd	$I_f = 20\text{mA}$ (Note 1)
Viewing Angle	$2\theta_{1/2}$	—	60	—	Deg	Note 2
Peak Emission Wavelength	λ_p	X=0.32 CRI: Y=0.33 6000–7000 K			nm	$I_f = 20\text{mA}$
Spectral Line Half-Width	$\Delta\lambda$	15	20	25	nm	$I_f = 20\text{mA}$
Turn on Time	Duty	—	1/20	—	ms	$I_f = 20\text{mA}$
Blinking Frequency	Fled	1.5	1.8	2.4	Hz	$I_f = 20\text{mA}$
Forward Voltage	V_F	3.0	—	5.0	V	$I_f = 20\text{mA}$
Reverse Current	I_R	—	—	10	μA	$V_R = 5\text{V}$

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.